



9CH AI NVR with 8CH PoE

NVR3109S1P8




- Video Input: 9CH
- Motion Detection: 9CH
- AI Function
- Up to 12MP Resolution Recording
- H265/H264/H265+/H264+
- 1 SATA HDD Up to 10 TB capacity for each HDD

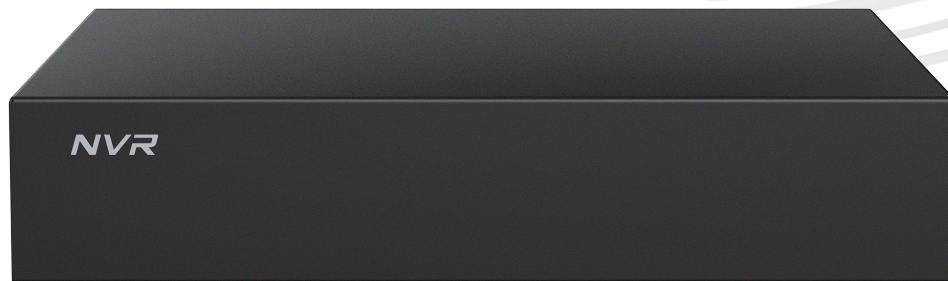

Video	
Input	9CH(12MP/8MP/5MP/4MP/3MP/1080p/1280x1024/960p/720p/D1)
Output	1*HD
Audio	
Input	N/A
Output	N/A
Audio Bit Rate	64kbps
Audio Compression standard	G711U, G711A, AAC, MP2L2
Intercom	N/A
Alarm	
Sensor Input	N/A
Output	N/A
Motion Detection	9 Channel, MD Zones: 396 (22 × 18)
Trigger Events	Recording, Email, FTP, Snapshot and Screen Tips, Pop-up Window, Notify Surveillance Center
Display	
HD Output1	4K(3840*2160)/2K(2560*1440)/1920*1080/1280*1024/1280*720/1024*768
HD Output2	N/A
VGA	N/A
Display Split	9CH/8CH/6CH/4CH/2CH/1CH
Digital Zoom	YES
OSD	Camera Title, Time, Recording, Motion Detection, Event Alarm
Event	
Smart Event	Intrusion Detection, Line Crossing Detection, Enter Area Detection, Leave Area Detection, Loitering Detection, People Gathering Detection, Face Detection, Illegal Parking Detection, Line Crossing Count, LPD(License Plate Detection), Abandoned Object Detection, Removed Object Detection, Heat Map
Normal Event	Motion, Video Tampering, Video Loss, Audio Detection, Scene Change
Recording	
Video Compression	H265/H264/H265+/H264+
Resolution	12MP/8MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/D1
Record Rate	PAL: 12MP@6CHx25fps,8MP@9CHx25fps,5MP@9CHx25fps,4MP@9CHx25fps,3MP@9CHx25fps,1080P@9CHx25fps,960P@9CHx25fps,720P@9CHx25fps, D1@9CHx25fps NTSC: 12MP@6CHx30fps,8MP@9CHx30fps,5MP@9CHx30fps,4MP@9CHx30fps,3MP@9CHx30fps,1080P@9CHx30fps,960P@9CHx30fps, 720P@9CHx30fps,D1@9CHx30fps
Record Mode	Manual\Timer\Motion Detection\Event
Playback & Backup	
Local Sync Playback	1CH 12MP@30fps, 1CH 8MP@30fps, 2CH 5MP@30fps, 4CH 4MP@30fps, 7CH 1080P@30fps, 9CH 720P@30fps, 9CH D1@30fps
Decode Capability	1080P@210fps
Remote Sync Playback	YES
Search Mode	Video, Picture, Event, Pedestrian, Vehicle, Face, License Plate

Playback Functions	Play, pause, fast forward, rewind, previous frame, next frame, electronic zoom, clip, audio
Backup Mode	USB Device/Network
Network	
Interface	1 x RJ45(10M/100M Adaptive Ethernet Interface)
Incoming Bandwidth	80Mbps
Outgoing Bandwidth	80Mbps
Network Functions	IPv4/IPv6/TCP/IP/HTTP/HTTPS/UPnP/DNS/NTP/SMTP/DHCP/FTP/DDNS/RTSP/RTCP/p2p/PPPOE/SNMP
Onvif	Profile S, Profile T, Profile G
Web Browser	Edge, IE8-11, Google Chrome, Firefox, Safari
CMS Software	Support Windows 10/Windows 11/MAC OS
Cloud Support	Yes
Smart Phone	iPhone, Android
POE	8 x Independent 100Mbps POE Network Interfaces(Output Power AT mode 30W per Interface, AF mode 15W per Interface), 45/78 line order, Total Power Output 45W, Support Plug and Play, Support network cable extended mode Max. 200M
WIFI	N/A
Storage	
Interface Type	1 SATA Hard Disk Interface (3.5" SATA)
Capacity	Up to 8 TB capacity for each HDD
eSATA	N/A
General	
Language UI	Simplified Chinese, Traditional Chinese, English, Polski, Czech, Arabic, German, French, Portuguese, Spanish, Italian, Hungarian, Korean, Dutch, Greek, Japanese, Ukrainian, Kazakh, Hebrew
USB Interface	Rear panel: 2×USB 2.0
RS485	N/A
Power consumption	DC48V/1.36A ≤ 9.5W (Without Hard Disk)
Working Environment	-10℃~50℃, 10%~90%(humidity)
Product Dimension(W×D×H)	200X175X40(mm)
Net Weight	0.57kg(without HDD)
Gross Weight	1.26kg(without HDD)

Dimensions (mm)

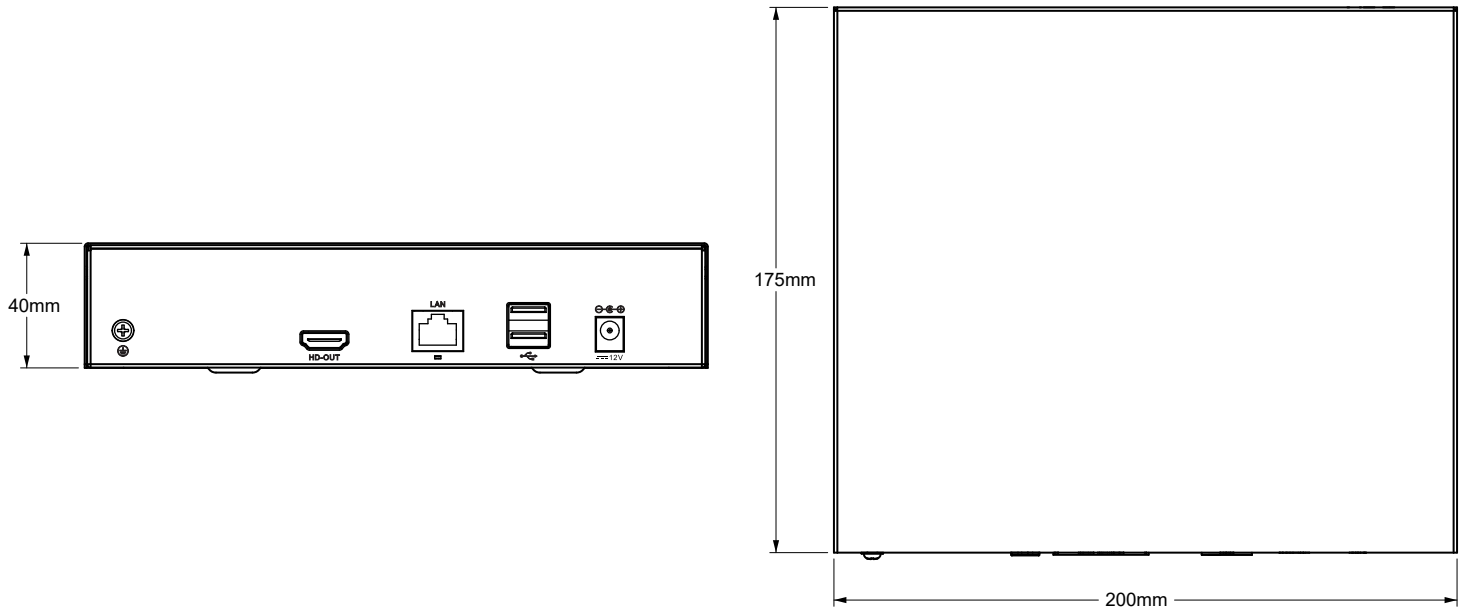

Connection Diagram

